

PRODUCT FACTSHEET

THE STRONGEST CHANNEL AWNING

The Zip Style awning will not only create an extra outdoor room but protect you from the harsh UV and ensure insects don't enter, thanks to the fabric running within the side channels. Ideal for moderate to windy conditions, as the fabric resists blowing out of the channels due to the hidden zip side channels providing protection from strong wind gusts. Consider the Zip Style if you have a courtyard or patio.



02 4726 5700 | nepeanblinds.com.au
Unit 1/89 Batt Street, Penrith NSW 2750



NEPEAN

BLINDS & DOORS

ZIP AWNINGS

Technical Info

Size Limitations

Control Type	Min Width	Min Drop	Max Width	Max Drop	Max Area
Manual Crank	1000	500	5000	4000	16 sqm
Light Lift	1000	500	5000	3000	12.75 sqm
Motorisation	1000	500	5000	4000	16 sqm

Operating Options

Zip Awnings can be operated by:

1. Manual Crank
2. Light Lift
3. Motorisation

Head Box Options

The Zip Awning comes with an closed head box.

Bottom Rail Accessories

Locking Bolt - Secures the awning into the side channel base, cable bracket or breaching staple. As the bolt is inserted inside the base rail, the system maintains its clean aesthetic, and allows the bottom rail to be positioned closer to the ground.

Hardware Colours

With 7 standard colours inspired by popular COLORBOND® and Dulux® colours, so your awning can complement most exteriors styles. Custom colours available.



Mombasa
Inspired by:
Night Sky®



Nocturnal
Inspired by:
Monument®



Thundercloud
Inspired by:
Woodland Grey®




Silver Pearl
Inspired by:
Citi Pearl®




Chardonnay
Inspired by:
Paper Bark®



Yalumba
Inspired by:
Classic Cream™



White Satin

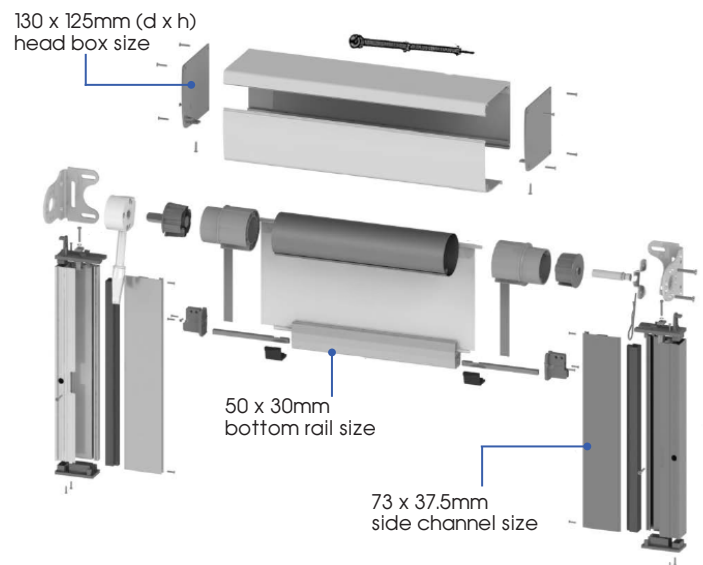

Benefits

Range of Fabrics

The Zip Awning can be made with sunscreen, acrylic, or canvas fabric all of which are effective in blocking harmful UV rays.

Child-Safe

The lack of cords or cables adds an extra level of child-safety.

Satisfaction Guaranteed

Quality installation is assured with our specialist team, and peace of mind with a 3 Year Warranty.

